

---

Insulating cable ladders  
U23X · Colour grey


67

---

Useful cross-sections and Safe working load

## Safe working load


**Temperature**



**+40°C**

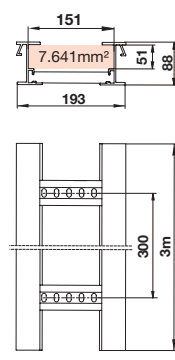
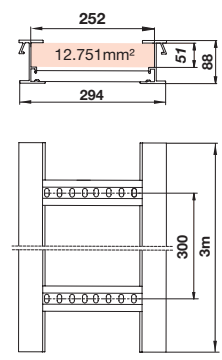


IEC 61537:2007

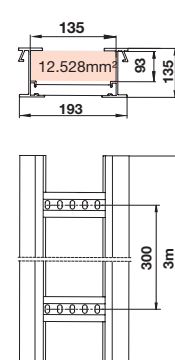
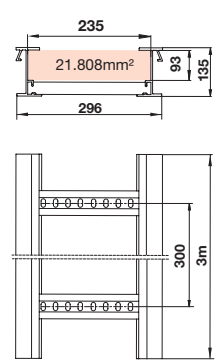


**Load**



IEC 61537\*

- **Test type I:**  
Longitudinal deflection: <1%  
Transverse deflection: <5%

	67200-04	67300-04
H: 85 mm		
		

	67220-04	67320-04
H: 135 mm		
		


Full load =  
0.0021kg/m/mm<sup>2</sup> x Useful cross section

67400-04	67500-04	67600-04

67420-04	67520-04	67620-04

## Safe working load


**Temperature**



**+60°C**







IEC 61537:2007







**Load**



IEC 61537\*

- Test type I:  
Longitudinal deflection: <1%  
Transverse deflection: <5%

	67200-04	67300-04
H: 85 mm	 	 
		

	67220-04	67320-04
H: 135 mm	 	 
		

Full load =  
0.0021kg/m/mm<sup>2</sup> x Useful cross section

67400-04	67500-04	67600-04

67420-04	67520-04	67620-04