

---



Goulottes de câblage  
U23X · Couleur bleu

77


---

Dimensions

# Dimensions (mm)



Compatible avec la norme EN 50085-2-3 et avec les normes qui se substituent à la DIN 43659 et à la NF C68-102

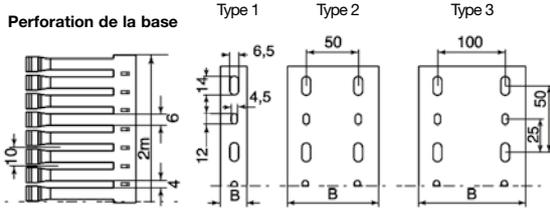

Réf.	Dimensions		Type perforation de la base	Cond.		
	Gris RAL 7030	Bleu RAL 5012			mm	
			A	B	m	
18.20.77			18	20	1	80
25.20.77			25	20	1	60
30.30.77			33	30	1	60
40.20.77			42	20	1	72
40.30.77			42	30	1	48
40.40.77			42	43	1	32
40.60.77			42	60	1	24
60.20.77			60	20	1	48
60.30.77			60	30	1	36
60.40.77		776040-06	60	43	1	32
60.60.77		776060-06	60	60	1	32
60.80.77			60	80	2	32
60.100.77			60	100	2	12
60.120.77			60	120	2	12
80.30.77		778030-06	80	30	1	28
80.40.77		778040-06	80	43	1	24
80.60.77		778060-06	80	60	1	24
80.80.77		778080-06	80	80	2	24
80.100.77		7780100-06	80	100	2	12
80.120.77		7780120-06	80	120	2	12
100.40.77			100	43	1	16
100.60.77			100	60	1	16
100.80.77			100	80	2	16
100.100.77			100	100	2	8
100.150.77			100	150	3	8

Matière : U23X