


Rail aislante
Rail isolant
Strut channel
Tragschiene
Perfil soporte
Prof. Sospensione.



Montaje
Montage
Assembly
Montage
Montagem
Montaggio



Desmontaje
Démontage
Disassembly
Demontage
Desmontagem
Smontaggio



Unex®



IMD 60202.8



60202-48
25x50





60204-48
50x50

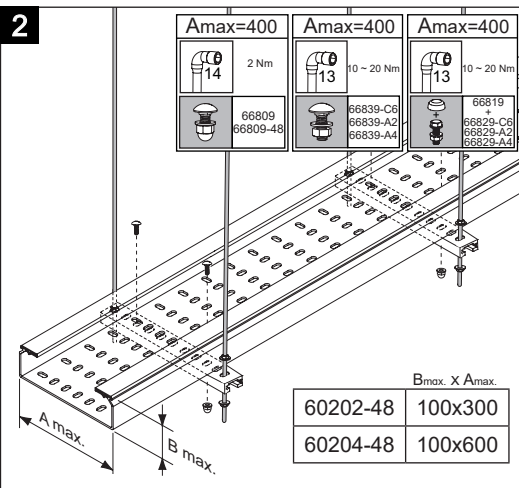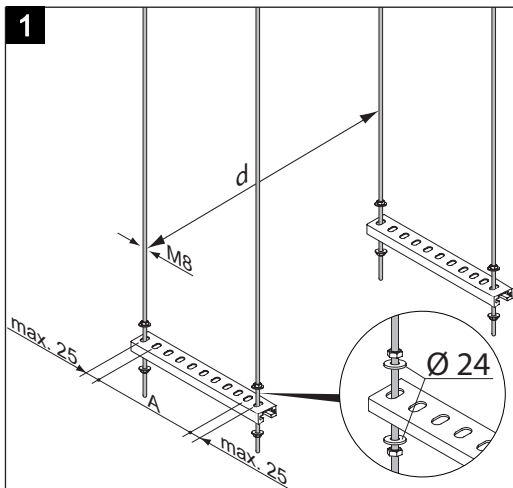

60202-48
25x50




60204-48
50x50

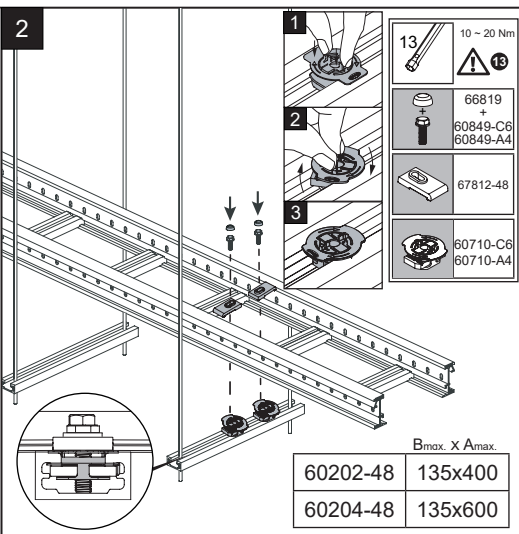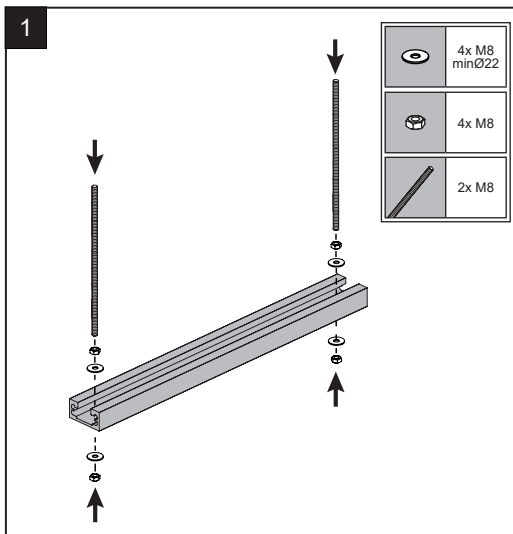





U48X		
	60202-48	60204-48
T	40°C	60°C
d	1,5 m	1 m

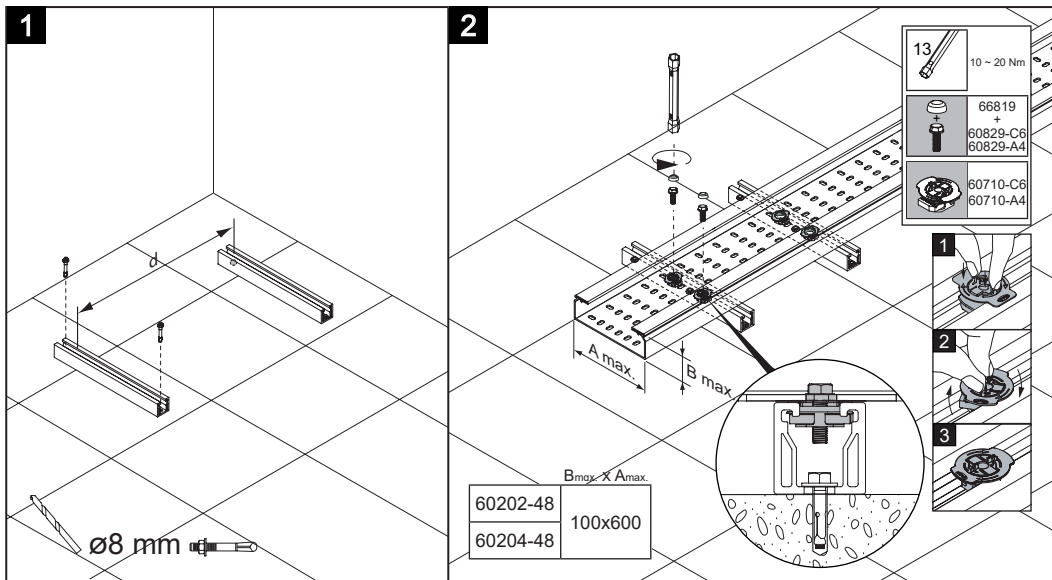




U48X		
	60202-48	60204-48
T	40°C	60°C
d	2 m	1,5 m
h:85 mm	2 m	1,5 m
h:135 mm	3 m	2 m

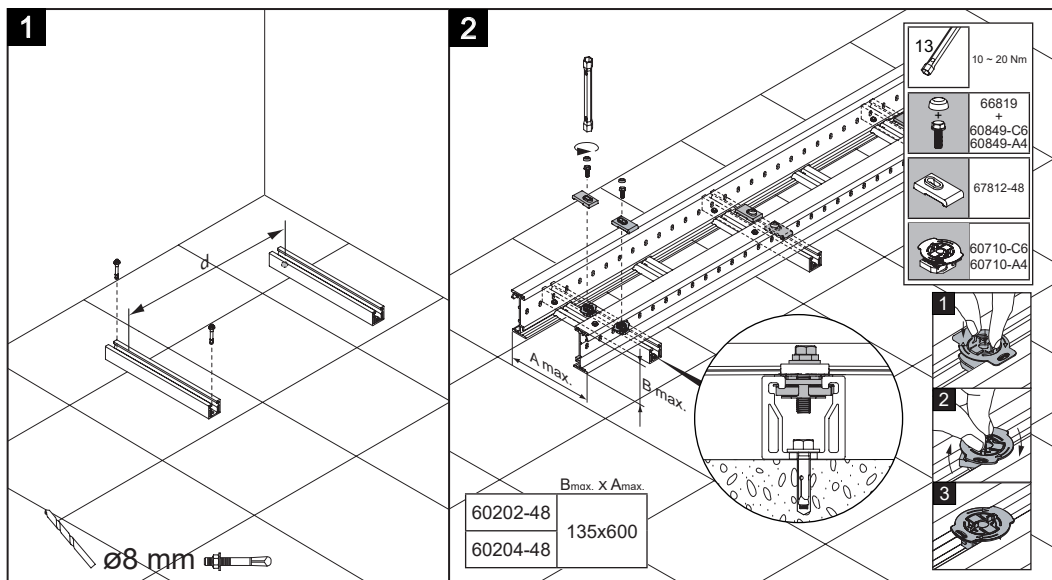

1




1

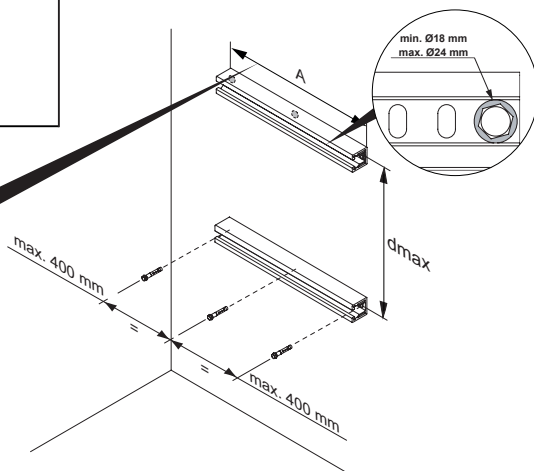



	60202-48	60204-48
T	40°C	60°C
dmax	1,5 m	1 m

2




	B _{max.} x A _{max.}
60202-48	100x600
60204-48	

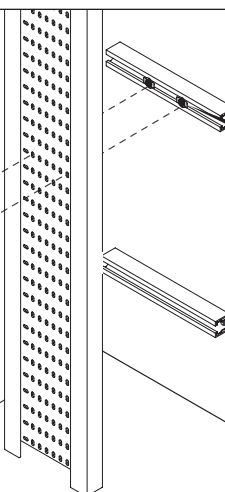

13	2 Nm
66819 + 60829-C6 60829-A4	
60710-C6 60710-A4	

3

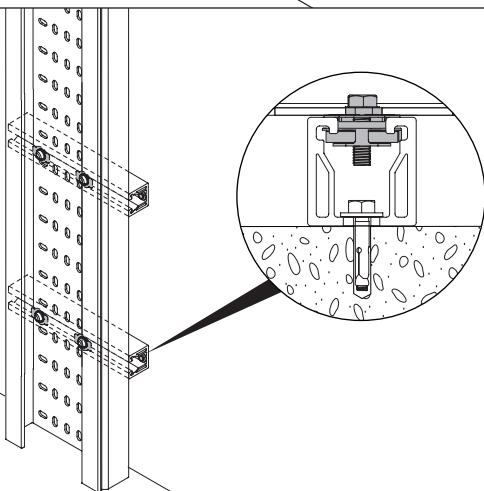

1

60202-48
25x5060204-48
50x50


Max. 1 Nm

10

67701-48
67711-48
67721-48
67731-48

Max. 2 Nm

14

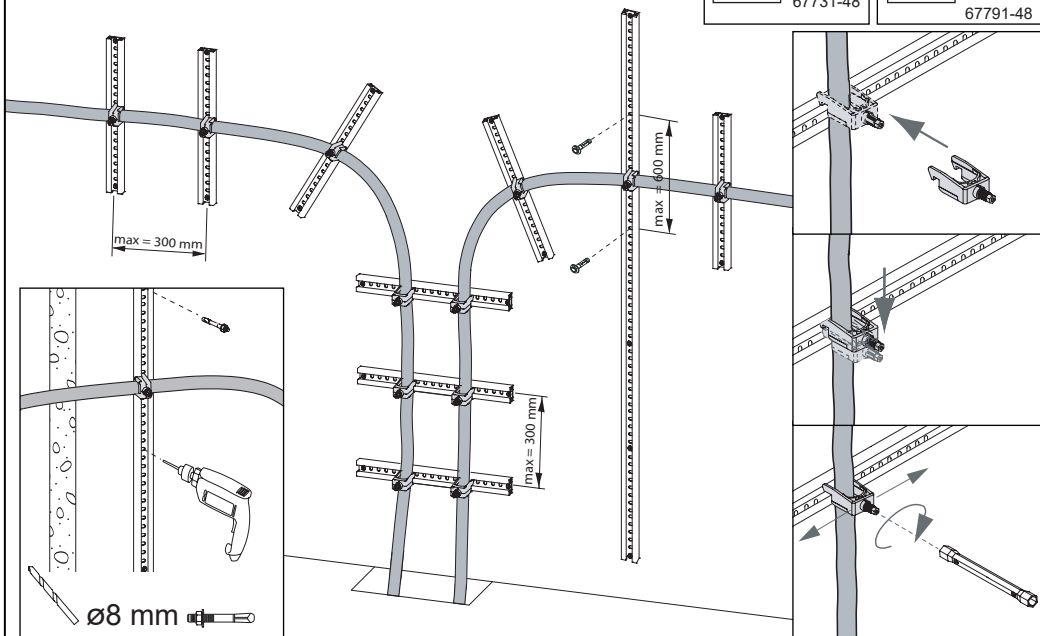67741-48
67751-48
67761-48
67771-48
67791-48

Ø8 mm

Ø8 / 12 mm

67701-48

Ø12 / 16 mm

67711-48

Ø16 / 22 mm

67721-48

Ø22 / 28 mm

67731-48

Ø28 / 34 mm

67741-48

Ø34 / 40 mm

67751-48

Ø40 / 46 mm

67761-48

Ø46 / 52 mm

67771-48

Ø58 / 64 mm

67791-48

