




Floor trunking halogen free

74

Power supply system for
work spaces

Product family information



**100% recycled halogen free
thermoplastic component**

U48X 

Large wiring capacity.


Adhesive base for easy pre-installation.

Protective film to prevent stains and scratches.

Insulating material: no earthing required nor
equipotential connection.

Technical characteristics

ELECTRICAL




No earthing required.

SERVICE TEMPERATURE




-5°C / +60°C

MECHANICAL



IK08

PROTECTION DEGREE




IP3X, mounted superficial on the floor.

IN FRONT OF FIRE



Non flame propagating.

LENGTH



2 m

RAW MATERIAL




100% recycled halogen free
thermoplastic component.

CE MARKING




Conformity with standard
EN 50085-2-2:2008.

For more detailed
information see data sheet



Conformity declaration

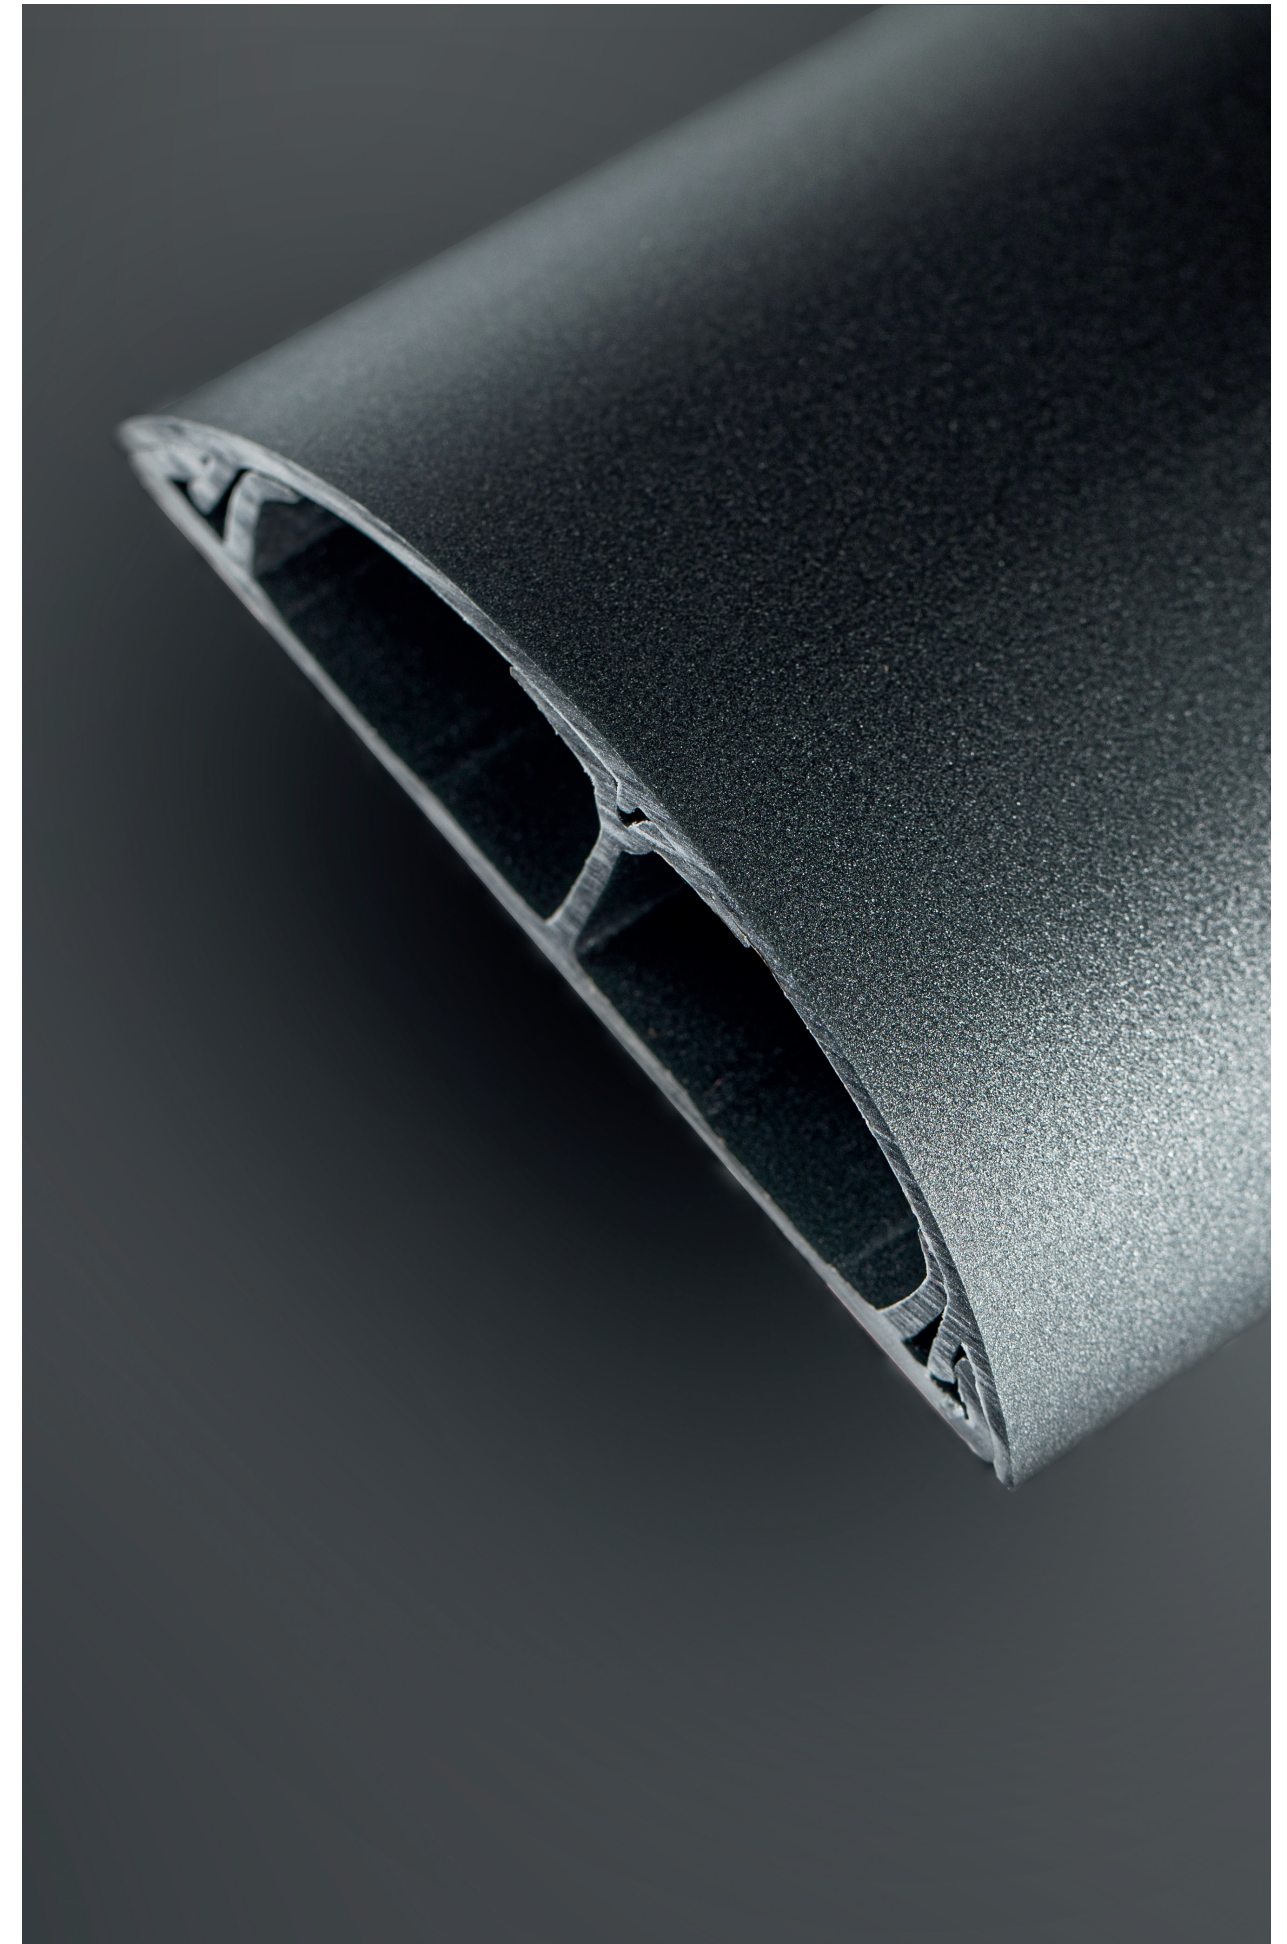



Work spaces: shop

	Sizes (mm)	12x50	18x75
Anthracite Anthracite	Dimensions (mm)		
	Maximum number of compartments	2	2
	Floor trunking 2 m	74010-45	74030-45



Work spaces: office