

---



Slotted trunkings  
U23X · Colour grey

77


---

Sizes

# Sizes (mm)



Fixing holes compatible with EN 50085-2-3\*

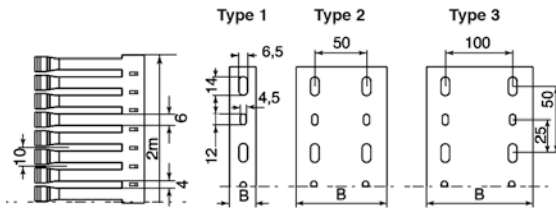

Part. no.		Sizes mm		Fixing holes type	Pack m
RAL 7030 GREY	RAL 5012 BLUE	A	B		
18.20.77		18	20	1	80
25.20.77		25	20	1	60
30.30.77		33	30	1	60
40.20.77		42	20	1	72
40.30.77		42	30	1	48
40.40.77		42	43	1	32
40.60.77		42	60	1	24
60.20.77		60	20	1	48
60.30.77		60	30	1	36
60.40.77	776040-06	60	43	1	32
60.60.77	776060-06	60	60	1	32
60.80.77		60	80	2	32
60.100.77		60	100	2	12
60.120.77		60	120	2	12
80.30.77	778030-06	80	30	1	28
80.40.77	778040-06	80	43	1	24
80.60.77	778060-06	80	60	1	24
80.80.77	778080-06	80	80	2	24
80.100.77	7780100-06	80	100	2	12
80.120.77	7780120-06	80	120	2	12
100.40.77		100	43	1	16
100.60.77		100	60	1	16
100.80.77		100	80	2	16
100.100.77		100	100	2	8
100.150.77		100	150	3	8

Material: U23X

\* BS EN 50085-2-3 is the UK implementation of EN 50085-2-3.