


Insulating cable ladders
U23X · Colour grey

67

Useful cross-sections and Safe working load

Safe working load


Temperature



+40°C







IEC 61537:2007







Load



IEC 61537*

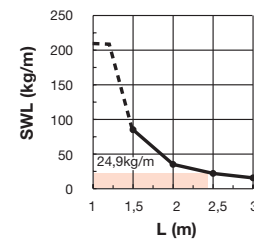- **Test type I:**
Longitudinal deflection: <1%
Transverse deflection: <5%

	67200-04	67300-04
H: 85 mm	 	 
		

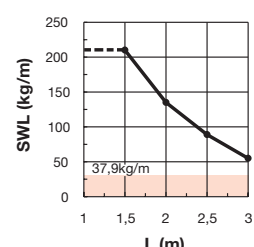	67220-04	67320-04
H: 135 mm	 	 
		


Full load =
0.0021kg/m/mm² x Useful cross section

67400-04	67500-04	67600-04

67420-04	67520-04	67620-04

Safe working load


Temperature



+60°C



IEC 61537:2007

Load



IEC 61537*

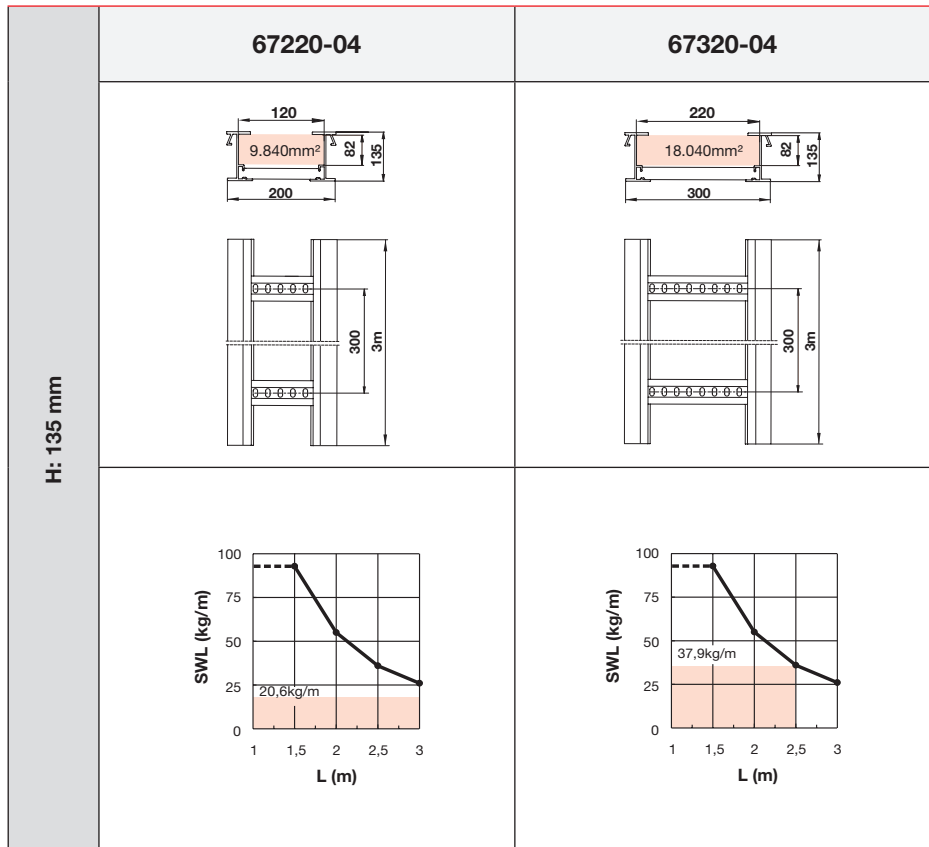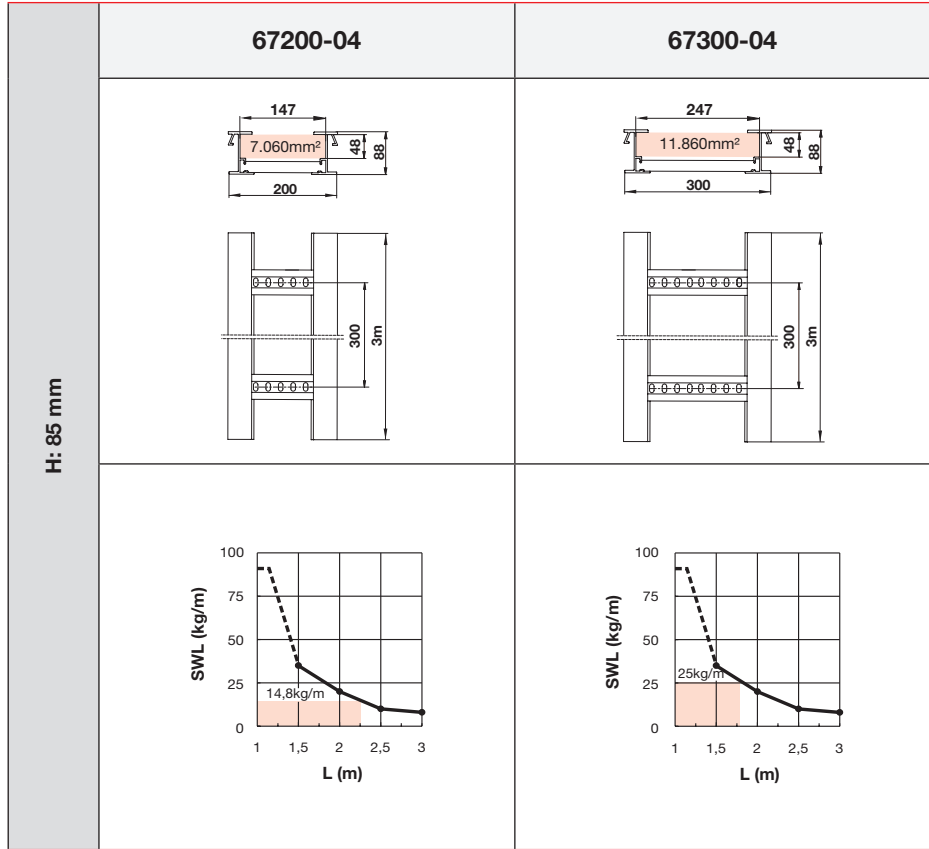- Test type I:
Longitudinal deflection: <1%
Transverse deflection: <5%



Full load =
0.0021kg/m/mm² x Useful cross section

67400-04	67500-04	67600-04

67420-04	67520-04	67620-04