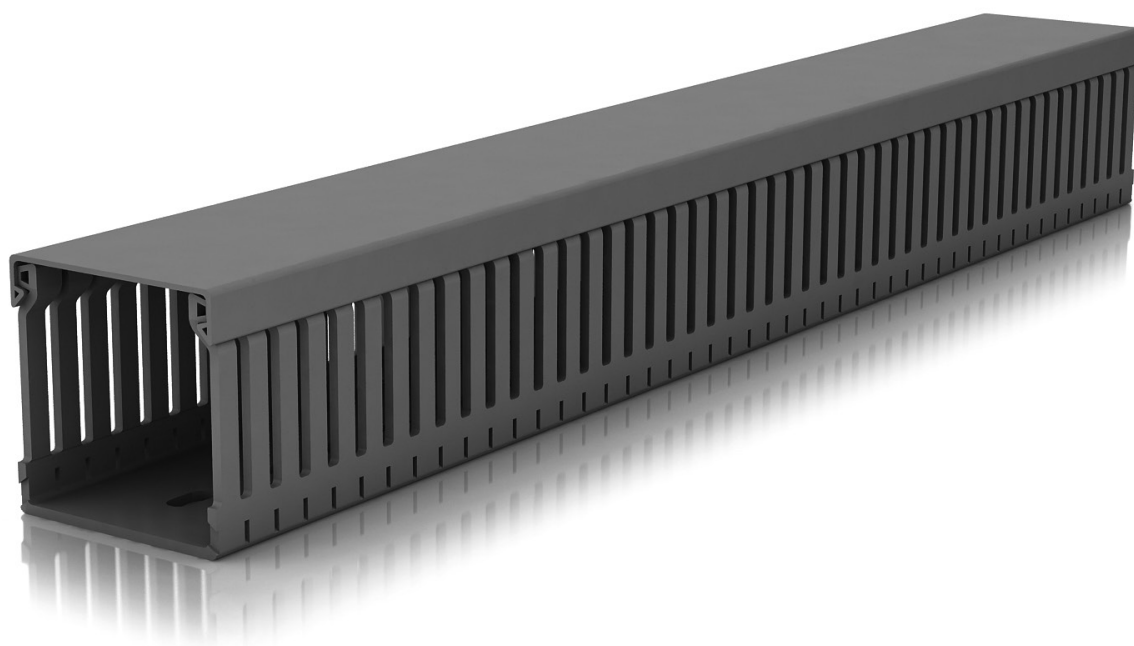





Canaletas ranuradas
U23X · Color gris


77



Secciones útiles


Secciones útiles (mm²)

Capacidades de cables recomendadas

Dimensiones (mm)		18x20	25x20	33x30	42x20	42x30	42x43	42x60
Ref.	Gris RAL 7030	18.20.77	25.20.77	30.30.77	40.20.77	40.30.77	40.40.77	40.60.77
		 234	 322	 728	 586	 940	 1460	 2112
Cables V250 Cantidad de cables (Calculada con coeficiente de llenado 1,5) *	0,5 mm ²	43	53	116	96	154	237	346
	0,75 mm ²	28	35	77	63	102	157	229
Cables H05/07 V-K Cantidad de cables (Calculada con coeficiente de llenado 1,5) *	1 mm ²	18	23	50	41	66	102	150
	1,5 mm ²	14	17	37	30	49	75	110
	2,5 mm ²	9	12	26	21	34	52	76

Dimensiones (mm)		60x20	60x30	60x43	60x60	60x80	60x100	60x120
Ref.	Gris / Azul RAL 7030 / RAL 5012	60.20.77	60.30.77	60.40.77 776040-06	60.60.77 776060-06	60.80.77	60.100.77	60.120.77
		 870	 1387	 2137	 3092	 4225	 5362	 6380
Cables H05/07 V-K Cantidad de cables (Calculada con coeficiente de llenado 1,5) *	1 mm ²	62	98	150	219	299	384	450
	1,5 mm ²	45	72	111	161	220	283	331
	2,5 mm ²	32	50	77	112	153	196	230
	4 mm ²	25	40	61	89	122	157	184
	6 mm ²	14	23	35	51	70	90	106

Dimensiones (mm)		80x30	80x43	80x60	80x80	80x100	80x120
Ref.	Gris / Azul RAL 7030 / RAL 5012	80.30.77 778030-06	80.40.77 778040-06	80.60.77 778060-06	80.80.77 778080-06	80.100.77 7780100-06	80.120.77 7780120-06
		 1865	 2874	 4128	 5630	 7177	 8572
Cables H05/07 V-K Cantidad de cables (Calculada con coeficiente de llenado 1,5) *	1 mm ²	132	203	291	399	504	606
	1,5 mm ²	97	149	215	293	371	446
	2,5 mm ²	68	104	149	204	258	309
	4 mm ²	54	83	118	162	206	247
	6 mm ²	31	47	68	92	118	142

Dimensiones (mm)		100x43	100x60	100x80	100x100	100x150
Ref.	Gris RAL 7030	100.40.77	100.60.77	100.80.77	100.100.77	100.150.77
		 3585	 5179	 7110	 9000	 13450
	Cables H05/07 V-K					
	Cantidad de cables					
	(Calculada con					
	coeficiente					
	de llenado 1,5) *					
	1 mm ²	253	366	502	633	994
	1,5 mm ²	186	271	369	465	732
	2,5 mm ²	129	188	257	324	508
	4 mm ²	103	149	204	258	402
	6 mm ²	59	85	117	148	201